



Since 1948

# 9427 Chopper

## Chop it! Mulch it! Blow It!



**Long lasting,  
reversible blades!**



**QUADRA-SHARK®  
blade sets a higher  
standard in chopper  
performance.**

- Patented unique, one-piece, four-point, double-edge rotor blade is designed for chopping and long life.
- The 3/16-inch (4.7 mm) thick, through-hardened steel blades are beveled and serrated for effective cutting action and provide plenty of strength for tough cutting conditions.
- No bolts, rivets, or welds on the blade, so snagging or wrapping of material is greatly reduced.
- Enjoy trouble-free performance from this rotor blade, whether chopping newspaper, hay, straw, or other materials.

**“I chopped 120 tons of hay and haven't turned the blade over. We've had no blade breakage. They still chop well after chopping 120 tons of hay.”**

**-Dairyman from Kenyon, MN**



# **Patz** 9427 Chopper

*Save materials... Save time... Save labor... The Patz Chopper uses less straw*

**No matter where you use it, the 9427 Chopper will save you time and labor!**

**No more shaking straw by hand for cow bedding or landscaping!**



“ It used to take us 5 hours to spread straw by hand. The Patz Chopper takes about 10-15 minutes to do the same job but better! ”

*-Landscaper from Crivitz, WI*



**Uniform coverage...** Provides a professional appearance for your finished project!

**Transports Easily!**

The chopper mounts to a pull behind trailer or can be used in the back of a pickup. Fork-lift pockets allow easy handling.

“ The Patz chops faster and better than the (other brand) we had previously. It’s a very good product. ”

*-Dairy Farmer from Redwood, NY*

(Trailer is shown for demonstration purposes only and is not available from Patz Corporation.)

**Also available:**



Stationary with Blower. Shown with Optional Discharge Hose and 120° Elbow.



3-Point PTO Driven with Blower.



Stationary with Bottom Discharge. Shown with Optional Electric Motor.



and covers more area in less time!

## Reverse or replace blades quickly and easily!

Simply lift the deck and disassemble the rotor shaft. The belts can be easily removed from the rotor shaft pulley. Also, there are no knives to unbolt or bolt together.



### The rotor assembly

has 20\* rotor blades in a spiral mounting to provide fast, efficient cutting.

(\*Choppers with blowers have 13 rotor blades.)

Large 5-inch (127 mm) diameter, diecast aluminum spacers reduce wrapping. The 1½ - inch (38 mm) diameter hex shaft is strong to handle the torque.

The rotor speed of 2,850 RPM cuts at a high-volume rate. There is a double-belt drive to the rotor.




**The deck** is hinged for convenient inspection of the rotor.

On choppers with blowers, the deck lifts off.



**A single-handle, seven-position grate control** allows varying length of cut and adjusts material flow rate.

Two-bolt flange rotor shaft bearings are mounted outside the chopper frame to minimize contamination and allow easy lubricating and servicing. (Guard removed for viewing.)

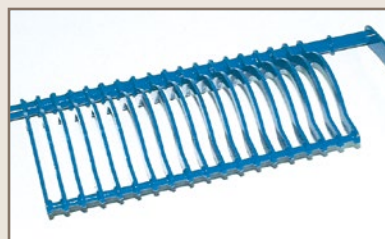

**An adjustable grate is standard equipment.** The grate and rotor are designed for short chopping of straw, hay, bark, plastics, and many more materials.

Each ¼-inch (6 mm) thick grate finger is welded at both ends to the two full-length grate shafts for rigidity.



**The polyethylene deck top** eliminates metal-to-metal contact and provides easy tub rotation. Also, the polyethylene deck top along with the polyethylene tub skirt form a tight seal to help prevent leakage of paper and other materials.

Grippers hold the bale as the steel tub rotates.



### Convenient controls

All controls are grouped together for convenient and easy operation. Labels indicate clearly what each lever controls and direction to move it.

#### Control levers vary on each model:

- Parking Brake
- Rotor Engagement (engine powered models only)
- Grate Height Adjustment
- Tub Rotation Engagement

The fire extinguisher (Class ABC Rated) is standard on all Model 9427 Choppers.



Two adjustable discharge doors direct the flow of materials.

# Specifications

Choose the chopper that's right for your operation!

|   | Portable Chopper        | Stationary Chopper  | Chopper w/Blower      | 3 Pt. Hitch Chopper w/Blower |
|---|-------------------------|---------------------|-----------------------|------------------------------|
| <b>Gasoline Engine</b>                                    |                         |                     |                       |                              |
| Honda 13 HP, 1 cyl, recoil or electric start              | X                       |                     |                       |                              |
| Briggs & Stratton 16 HP, 2 cyl. V-twin, recoil start only | X                       |                     | X                     |                              |
| Briggs & Stratton 18 HP, 2 cyl. recoil start only         |                         |                     | X                     |                              |
| <b>Electric Motor</b>                                     |                         |                     |                       |                              |
| 3 HP, single phase  | X                       | X                   |                       |                              |
| 5 HP  |                         | X                   | X                     |                              |
| 7 1/2 HP  |                         |                     | X                     |                              |
| 10 HP   |                         | X                   | X                     |                              |
| <b>PTO Shaft</b>  |                         |                     |                       |                              |
| 540 RPM (6 spline) P.T.O. drive line                      |                         |                     |                       | X                            |
| <b>Rotors</b>   |                         |                     |                       |                              |
| Quadra-Shark® Blades                                      | 20 blades/80 knives     | 20 blades/80 knives | 13 blades/52 knives   | 13 blades/52 knives          |
| Rotor Speed   | 2850 RPM                | 2850 RPM            | 2850 RPM              | 2850 RPM                     |
| <b>Grate</b>  |                         |                     |                       |                              |
| 7 position adjustable                                     | X                       | X                   | X                     | X                            |
| Standard Cut: grate fingers                               | 19                      | 19                  | 13                    | 13                           |
| <b>Frame</b>  |                         |                     |                       |                              |
| Deck  | Flip up                 | Flip up             | Lift up               | Lift up                      |
| Discharge   | Adjustable side doors   | Bottom              | Bottom to blower      | Bottom to blower             |
| <b>Control Levers</b>                                     |                         |                     |                       |                              |
| Parking Brake   | X                       |                     |                       |                              |
| Rotor Engagement  | X                       |                     | X (Eng. Powered Only) |                              |
| Grate Height Adjustment                                   | X                       | X                   | X                     | X                            |
| Tub Engagement  | X                       | X                   | X                     | X                            |
| <b>Tires</b>  |                         |                     |                       |                              |
| Front   | (2) 8" rib w/inner tube |                     |                       |                              |
| Rear - center mounted swivel caster                       | 4" w/inner tube         |                     |                       |                              |
| <b>Blower</b>   |                         |                     |                       |                              |
| Replaceable Paddles                                       |                         |                     | 18" Diameter<br>4     | 18" Diameter<br>4            |
| Vertical Discharge  |                         |                     | X                     | X                            |
| Horizontal Discharge                                      |                         |                     | X                     | X                            |
| Size of Discharge   |                         |                     | 6" Diameter           | 6" Diameter                  |
| <b>Fire Extinguisher</b>                                  |                         |                     |                       |                              |
| 5 lb. Class ABC Rated                                     | X                       | X                   | X                     | X                            |
| <b>Options</b>  |                         |                     |                       |                              |
| Additional Swivel Wheel                                   | X                       |                     |                       |                              |
| Hour Meter  | X                       | X                   | X                     | X                            |
| Adjustable Screen   |                         | X                   | X                     |                              |
| 20 ft. long PVC Hose                                      |                         |                     | X                     | X                            |
| 6" Dia. Pipes, elbows, couplers                           |                         |                     | X                     |                              |
| Blower Screen Pkg. (1/2" or 1" holes)                     |                         |                     | X                     | X                            |
| 120 degree elbow  |                         |                     | X                     | X                            |



**CAUTION:** Never operate Patz equipment without all shields and guards in place. Safety is no accident. Before operating any piece of equipment, be sure to read and understand the operators manual. The manual should be kept with the machine at all times.

Additionally, make sure all safety shields and devices are functioning properly and are securely in place.



For some photos in this brochure, guards were removed for photographic purposes only to allow viewing of the equipment features. Before operating equipment, all guards must be in place. Because Patz continually improves and updates products, Patz reserves the right to change the construction of machines or attachments or any part thereof without incurring any obligation to make like changes on Patz machines, or attachments previously delivered.

Specifications and prices subject to change without notice.



Since 1948

**Proven Performance You Can Count On!**

**Patz Corporation**

917 Business 141, POB 7 • Pound, Wisconsin 54161-0007

Ph: (920) 897-2251 • Fax: (920) 897-2142

www.patzcorp.com • info@patzcorp.com

